

## ASSEMBLY INSTRUCTIONS

## Club Large Hexagonal Flush Mount

Item # CHC4126


**WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.**

**WARNING \*\*\* SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

**INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.**


**ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.**

Illustration A:



To assemble safety cables:

1. Join fixture safety cables with safety cable from ceiling.
2. Wrap both safety cable around the lock nut (a).
3. Insert clip (b) into both holes on lock nut (a), secure with nuts (c).
4. Push the lock nut into outlet box.

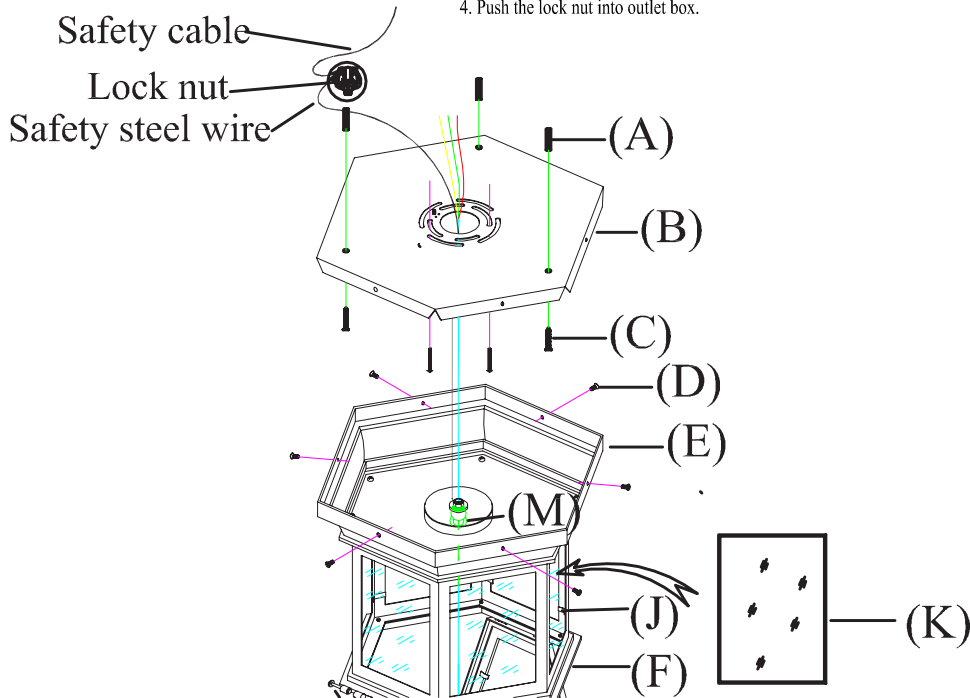

1. Open the door (G) by loosening the locking pins (H).
2. To install glass panel (L) provided to front frame (G), make sure metal tabs (J) are flipped against the opening of the frame. Place glass panel (L) to front frame and secure glass panel (L) by bending back metal tabs (J) towards the glass panel. Install rest of the six glass panels (K) into side frames and secure with the metal tabs on the frame.
3. Attach the top hook on the candelabra assembly (I) to the loop (M).
4. Remove mounting plate (B) from lantern base (E) by removing base screws (D) and set aside.
5. Place mounting plate (B) on the ceiling outlet box, use mounting plate (B) as a template, mark center points for four mounting holes on the mounting plate (B). Remove mounting plate (B).
6. Drill small holes on the marked location, the holes should be big enough to accommodate with plastic anchors (A). Push plastic anchors (A) into the holes.
7. Connect the safety steel wire from the fixture to the safety cable from ceiling with lock nut. (As shown in illustration A)
8. Connect the hot wire from the fixture (with words on surface) to the hot junction box wire from the outlet box (usually BLACK). Fasten them together with a plastic wire connector provided and wrap connection with electrical tape.
9. Repeat this procedure for the neutral wire from the light fixture (without words on surface) to the wire from the outlet box (usually WHITE).
10. Connect the ground wire from the light fixture (bare copper) to the ground wire from the outlet box.

## ASSEMBLY INSTRUCTIONS

## Club Large Hexagonal Flush Mount

Item # CHC4126


**WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.**

**WARNING \*\*\* SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

**INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.**


**ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.**

Illustration A:



To assemble safety cables:

1. Join fixture safety cables with safety cable from ceiling.
2. Wrap both safety cable around the lock nut (a).
3. Insert clip (b) into both holes on lock nut (a), secure with nuts (c).
4. Push the lock nut into outlet box.

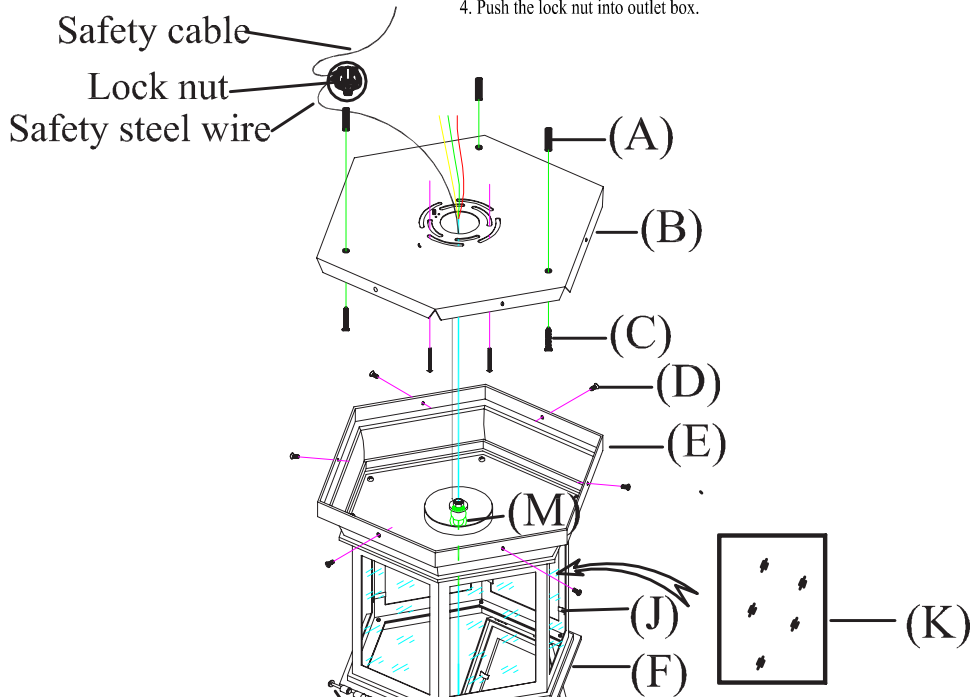

11. Affix mounting plate (B) to the ceiling outlet box by aligning mounting holes with center hole of plastic anchors (A), inserting mounting screws (C) to secure mounting plate (B) to the wall.
12. Attach lantern base (E) to mounting plate (B) and tighten with base screws (D).
13. Insert light bulbs (not included) into sockets.
14. Close the door (G) by inserting locking pins (H).
15. INSTRUCTIONS FOR MOUNTING FIXTURE OUTDOORS AND/OR IN WET LOCATION:
  - a. Mounting surface should be clean, dry, flat and 1/4" larger than canopy/ fixture base on all sides. Any gaps between the mounting surface and canopy exceeding 3/16" should be corrected as required.
  - b. With silicone (EX. GE-108) caulking compound, caulk completely around where back of canopy meets the wall surface to prevent water from seeping into outlet box.