



2″

45360 TRIMLESS SQUARE FIXED DOWNLIGHT



SPECIFICATIONS

 Max Ceiling thickness 5/8". • Approved for wet location.

• Cut hole: ø2 7/8" x 2 7/8". • Fixture: ø4 1/16" x 5 9/16"H.

enclosed in junction box.

• 1 x 15W Integrated LED COB.

• Beam angle: 38 degree.

IC

AIR TIGHT

ORDERING GUIDE

• Lumen maintenance 70% 50,000 hrs.

27K

• TRIAC and ELV dimming.

• 120 V Input class 2 constant current dimmable driver

• Min operating temperature (-4°F~104°F)(-20°C~-40°C).

|30K |35K

FINISH

Black White

• Delivered Lumen: 853 lm |917 lm |993 lm |1029 lm |1003 lm

40K

50K

JA8 COMPLIANT

• IC Airtight Cast aluminum body. Remodel application. Mesh plate included. • Mates to driver box with quick connector.

LIGHT HOUSING

DIMENSIONS

ELECTRICAL

LIGHT MODULE

Kelvin (CCT):

CERTIFICATIONS

• CRI: 90+

 (\mathbf{I})

MODEL

45360-022

45360-015

The Midway collection is a family of integrated led recessed lights available in sizes ranging from 2"-6". With their durable die cast aluminum bodies and built on CCT color selecting switch Midway family fixtures are aesthetically appealing, functional and extremely versatile. Their IC rated shallow bodies allow them to be used in most residential and commercial installations with or without insulation in the ceiling. Midway fixtures are available in white or black finish and come standard with a reliable phase dimming power supply.

PROJECT:	_
TYPE:	_
DATE:	_
NOTES:	





2700K . 3000K . 3500K . 4000K . 5000K

	WATTS	LUMENS	KELVIN	DIMMABLE	CRI	BEAM Angle	ADJUSTABLE
2 7/8" x 2 7/8"	15W	Up to 1029	CCT Selectable	TRIAC/ELV	90+	38°	NO



PRODUCT DIMENSIONS



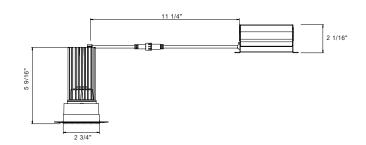

ACCESSORIES



45612-012 3 pin Connector



45599-019 NEW CONSTRUCTION SMASH PLATE 2 13/16" x 2 13/16"



NO IC BOX REQUIRED

www.eurofase.com Tel: 905.695.2055 Fax: 905.695.2056 Toll Free: 1.800.660.5391 Toll Free: 1.800.660.5390





015- White